



Installation manual

Installation of the FLOWIS radio module on the water meter generation "ECO"


1. Remove the cover from the Wasser-Geräte Koax "ECO" water meter, prying it open on the left side

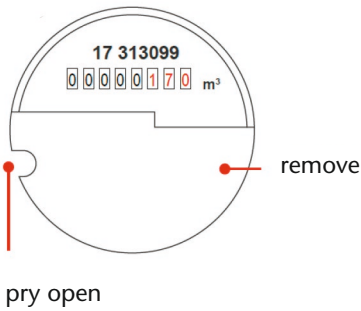


2. Slide the radio module in place of the cover

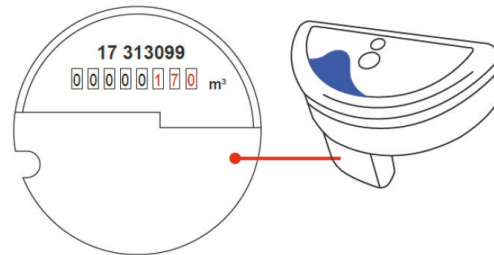


3. Slide the screw into the opening in the middle part of the radio module (opening no. 1)

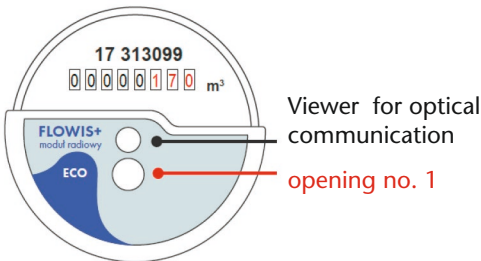

4. With a torque screwdriver with a Torx T6 bit tension the screw with an appropriate force (0.3 Nm)

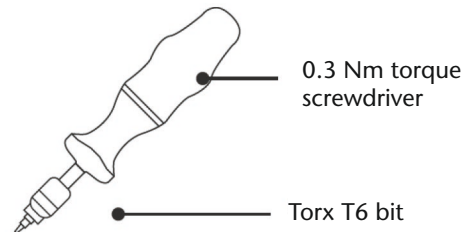

5. Place the seal on the tensioned screw, not obscuring the optical viewer

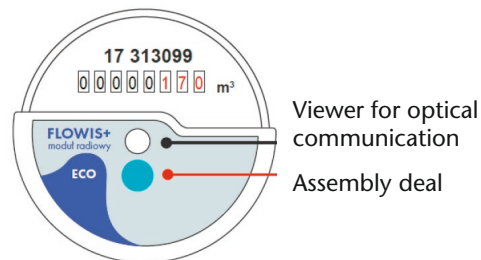

6. Programme the radiomodule

