

Programme the Radio Module


Turn on the programming set
(tablet, SWGP device, programming head)



b) Check if the SWGP device established a bluetooth connection with the tablet



c) Conect the programming head to the SWGP device

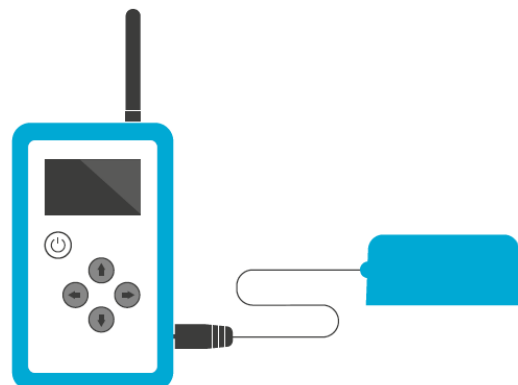

d) Start the "LibraRS" software in the tablet and log in



e) Put the programming head on the radio module, previously installed on the water meter so that the openings on the bottom of the head fit the tabs on the radio module

